



BEAD/92

EMI Filters

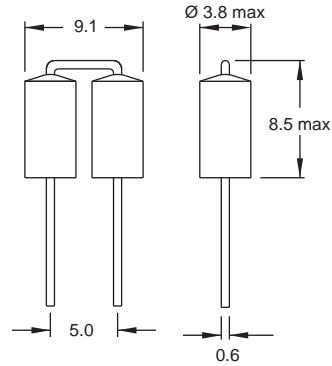

Z-f Characteristics

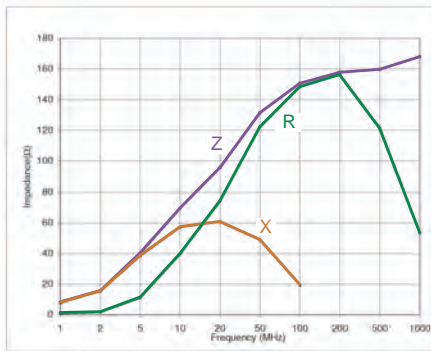

Part No	Impedance Z (Ω)				DCR max (mΩ)	Rated DC Current (A)
	10 MHz		25 MHz			
	Min	typ	Min	typ		
Bead /92-999X-51	50	80	70	110	20	6

Core Material: Ferrite

Revision date: 09 Jul 2019

SPQ: Taped / Ammo pack 2000 [-51]

Remark: Either one of the impedance parameter is guaranteed

Wide Band Chokes and Beads